

Vibromulch®

Stubble breaker with vibrating tines



The Professional's Choice


Exclusive technology

Vibrate to stubble break
Work up to 15 cm deep From 8 to 15 km/h

Vibromulch®

Between beam
610 mm

Approved signalisation
Traffic in complete safety

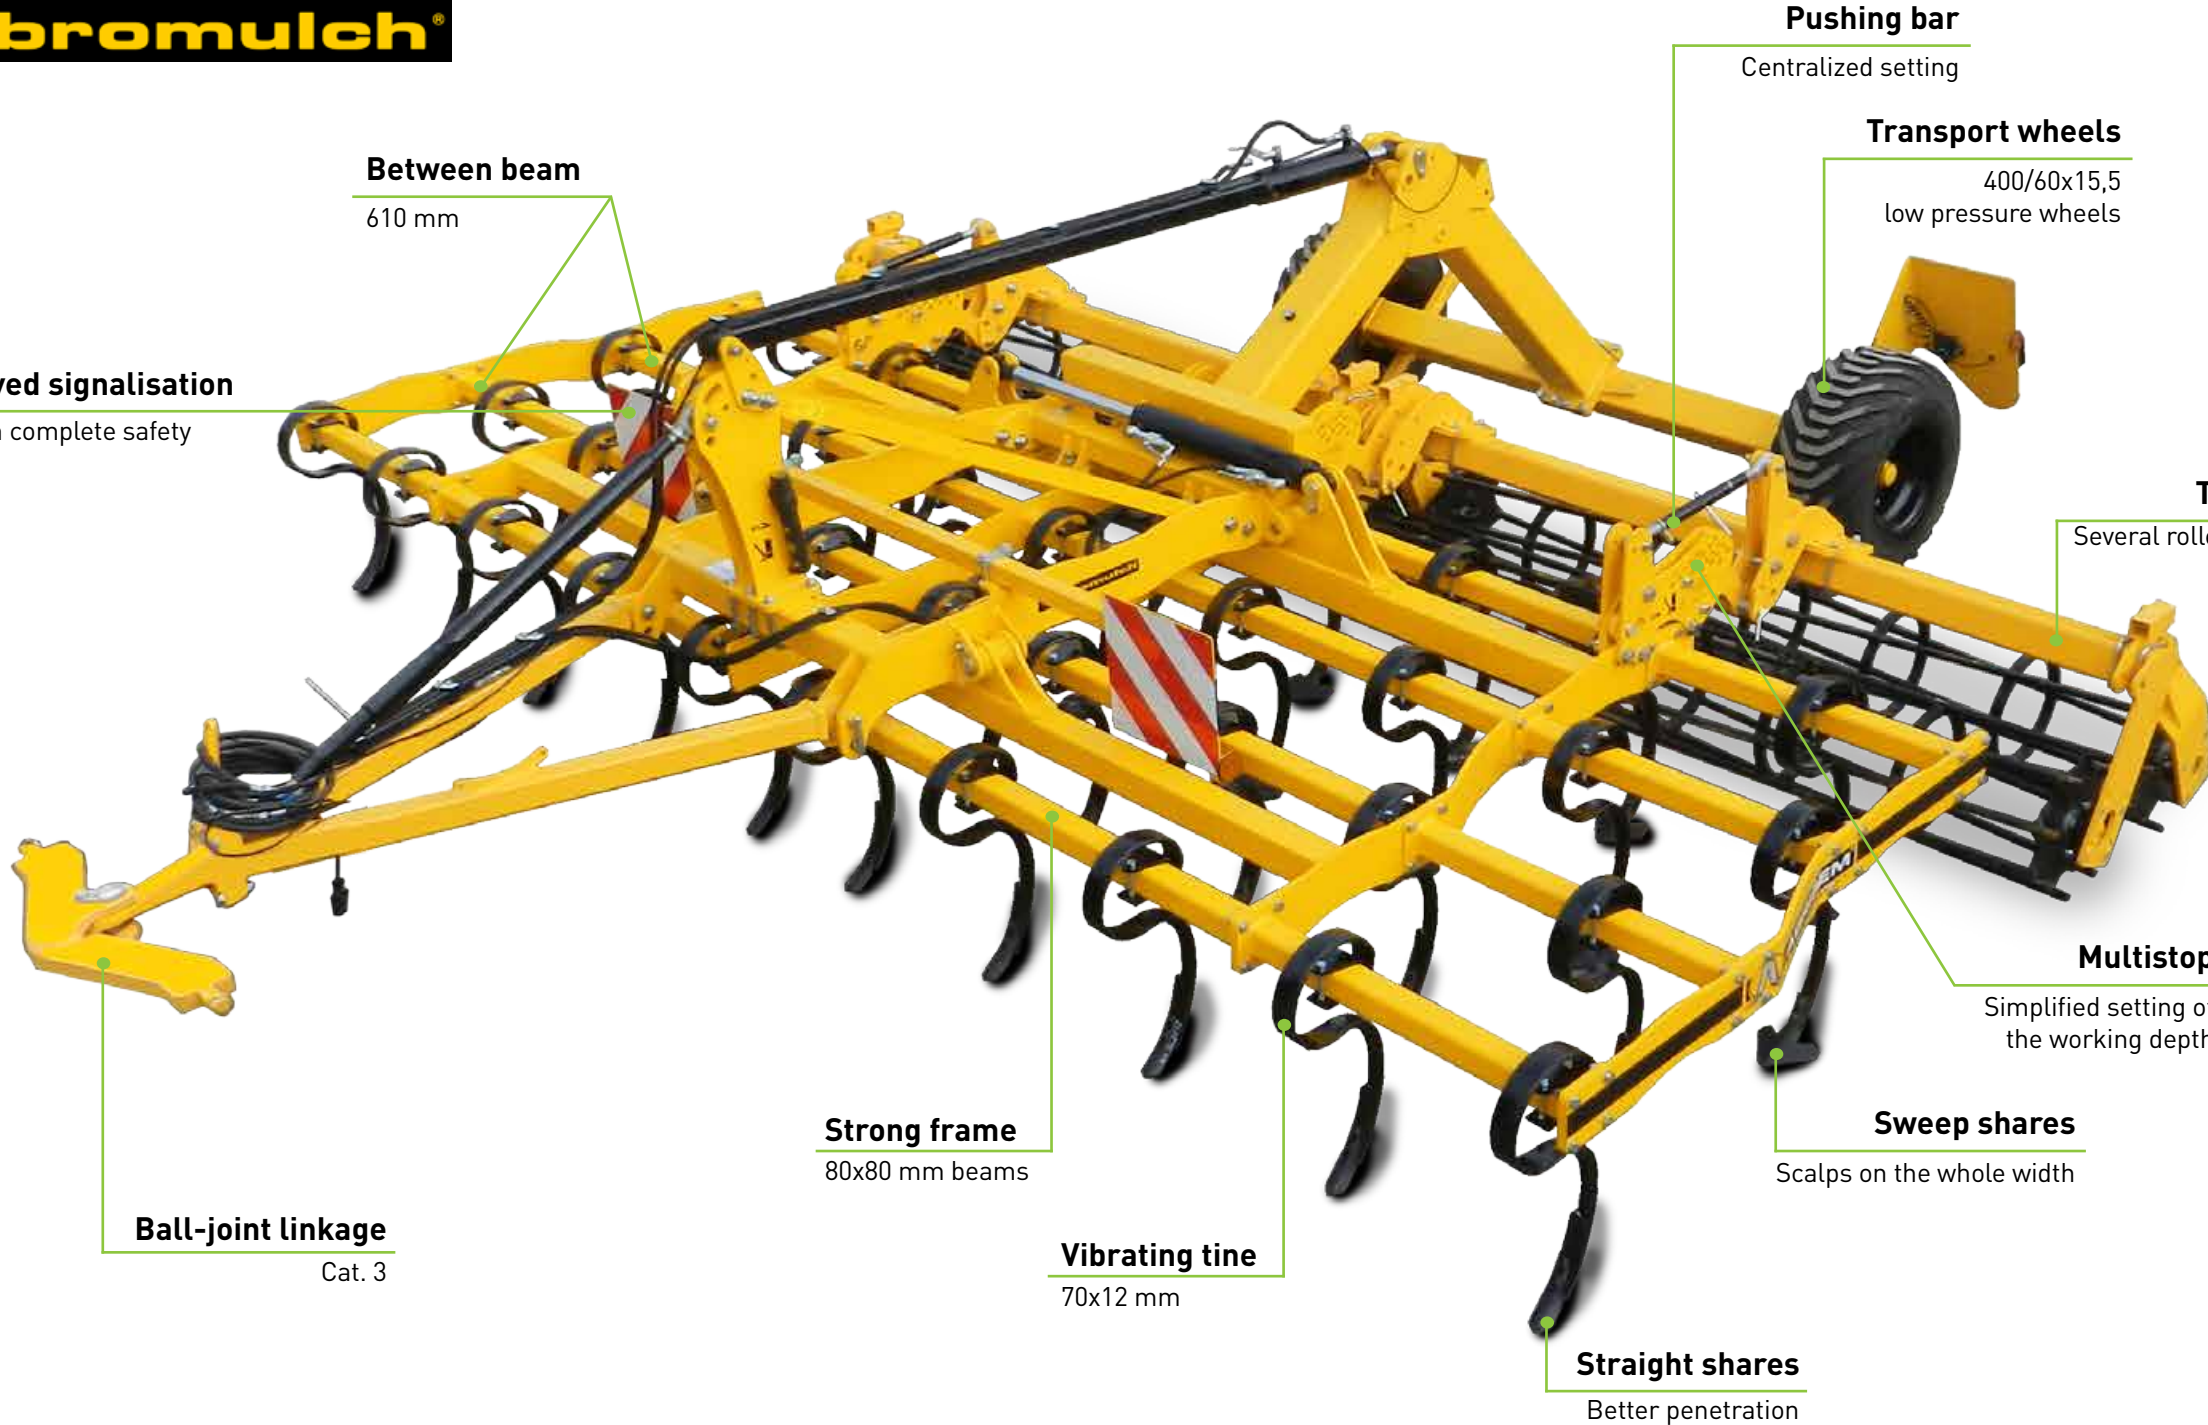

3m50 mounted
Ø450 Cage roller



6 m folding mounted
Ø526 Cage roller


Exclusive

Vibroseme



With a DSF 1600/2200 or DSF 1000 front hopper,
transform your stubble-breaker in a seeder.

Multifunctional tine and choice of the share

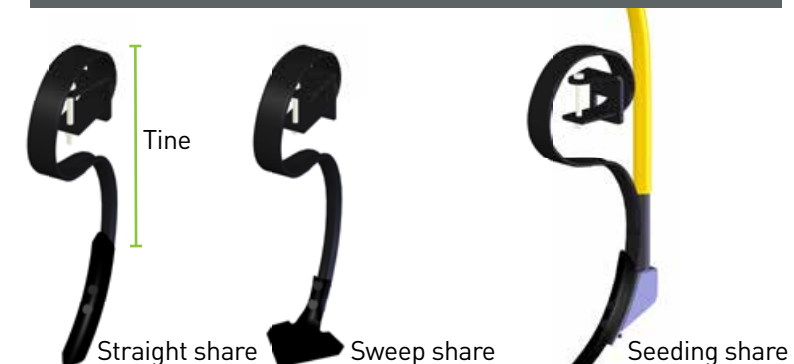

- No pivot = no maintenance
- Power saving and excellent crumbling
- Great multifunctionality of the machine

A complete setup



- Enables an optimal work
- An important penetration
- Scalps on the whole width

Circular courters



- Opens the soil before the passage of the tine
- Favors the passage in the important crops

Dividing up of the tines on 4 rows



- Important release and between-beams
- intensive brewing of the soil
- Capacity for going through the crops

Specifications

	Rigid models			Foldable models					
 Working width	3,00	3,50	4,00	4,00	5,00	6,00	7,00	9,00	12,00
 Weight (kg) with cage roller	1 130	1 210	1 290	1 910	2 250	2 575	3 160	9 200	10 800
 Power (hp)	75 - 120	90 - 140	110 - 160	120 - 160	140 - 200	160 - 230	180 - 250	250 - 320	280 - 360
 Number fo tines	20	22	26	24	32	36	42	54	72



Approved
machine



DS 200/500



DSF 1000




DSF 1600

ROLLERS

3 rows harrow




Cage Ø450 and Ø526




Twin Roller Ø450



Flexi-Roll Ø600

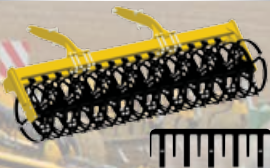


Combimulch 30

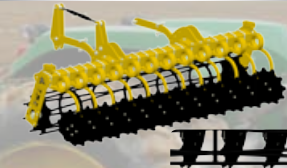


Double V-Sem Ø600




V-Sem Ø600

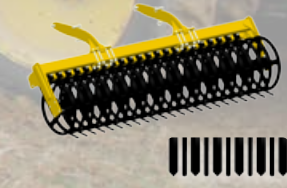

T-Sem Ø620

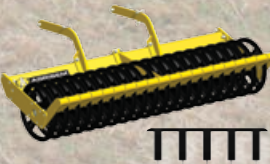

Agrix Ø700

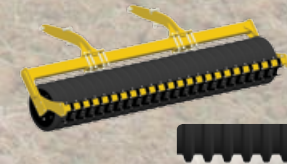

535 rue Pierre Levasseur
44158 ANCENIS - FRANCE

T. +33 (0)2 51 14 14 40
F. +33 (0)2 40 96 32 36

agrisem@agrisem.com
www.agrisem.com

Your dealer